ENFORCER® Access

Request-to-Exit Plate

SD-7202GC-PE Green, 2" square, push-button

Features:

- Stainless-steel, single-gang message plate.
- Large (2” square), illuminated, momentary push button.
- "PUSH TO EXIT” message can be replaced with “PRESIONE PARA SALIR” message.
- N.O./N.C. contacts rated 10 Amps.

Included:

- “PUSH TO EXIT” and “PRESIONE PARA SALIR” message plates.
- Five color-coded, 12-inch, AWG 18 wire leads with easy-to-attach spade lugs for fast installation.
- Stainless-steel single-gang plate.
- Replacement bulb (12V, 1.2W, 15,000-hour life).
- Resistor (150 ohm, 1 Watt).

“PRESIONE PARA SALIR” message plate also included

Connection Diagram:

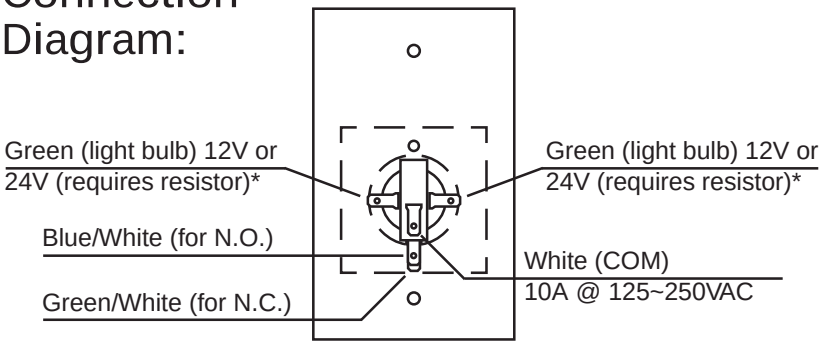
Green (light bulb) 12V or 24V (requires resistor)*
Blue/White (for N.O.)
Green/White (for N.C.)
Green (light bulb) 12V or 24V (requires resistor)*
White (COM)
10A @ 125~250VAC

*Note: Use 150 ohm, 1 watt resistor on either one of Green wires for 24 volt bulb operation.

Dimensions:

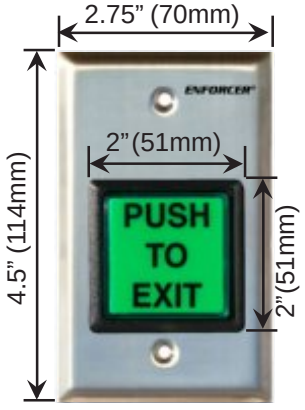

Copyright 2008 SECO-LARM U.S.A., Inc. All rights reserved.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM®
16842 Millikan Avenue, Irvine, CA 92606
1.949.261.2999 (CA & Int’l) 1.800.662.0800 Fax: 1.949.261.7326
Email: info@seco-larm.com Website: www.seco-larm.com